




## GUIDE & DIRECTIONAL SIGNING

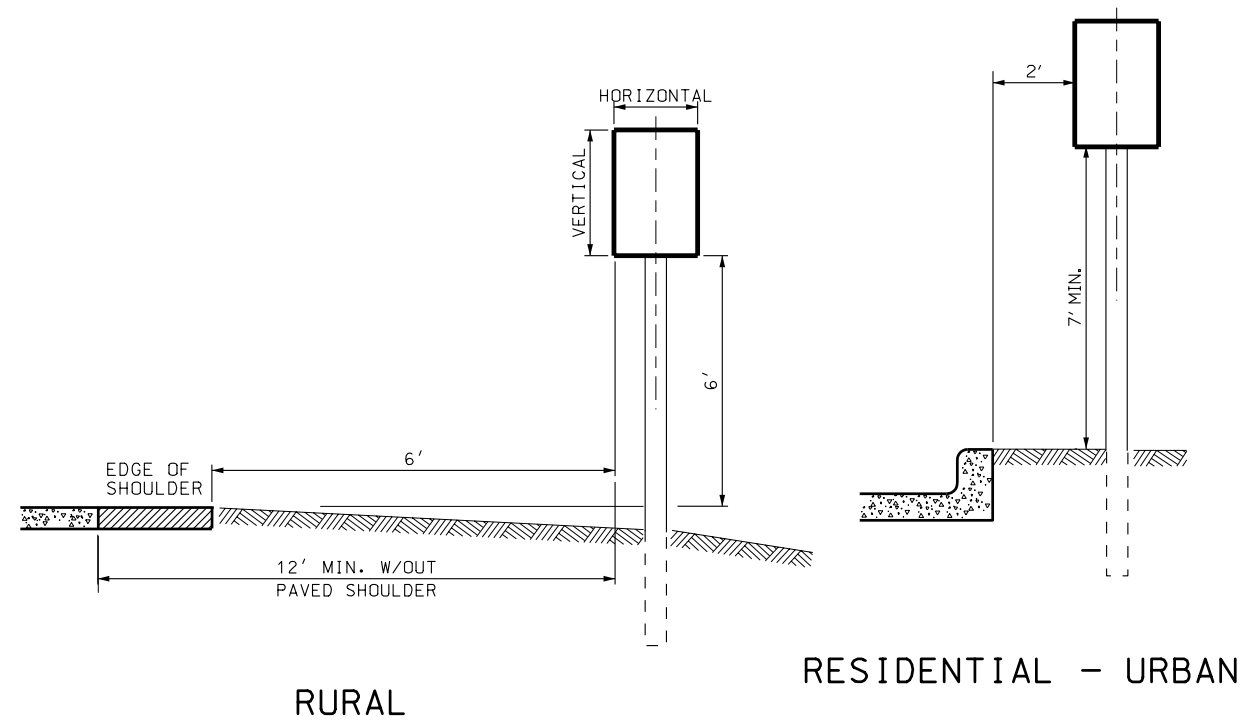




## SIGN INSTALLATION

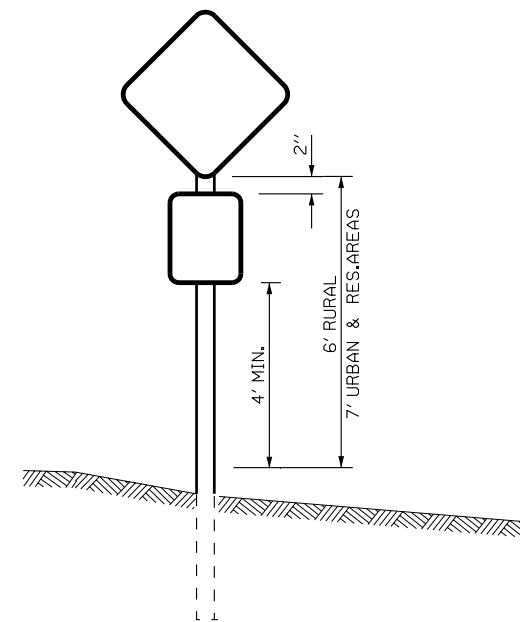

W/SUPPLEMENTAL SIGN

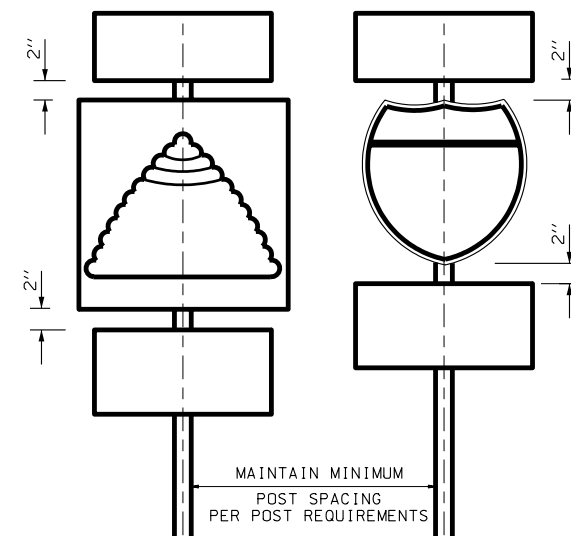

## ROUTE MARKERS

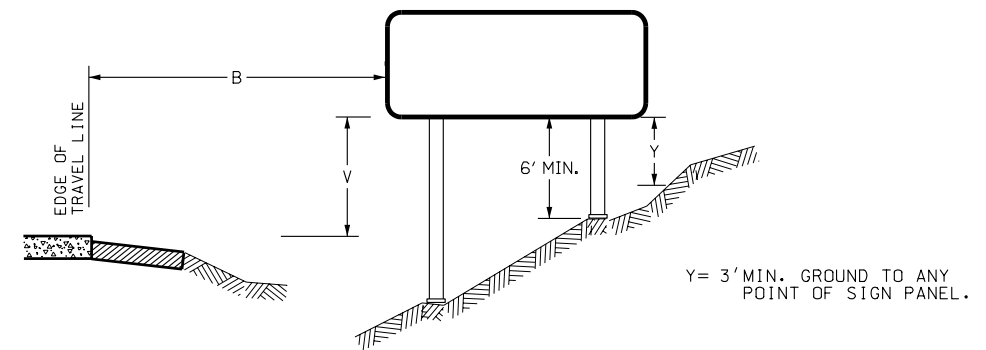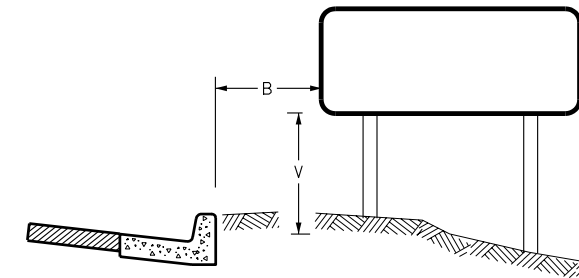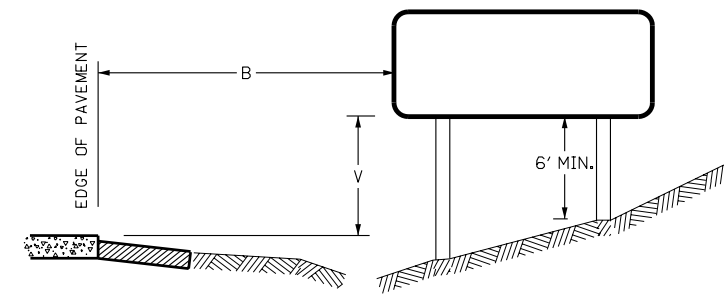

## GUIDE & DIRECTIONAL SIGN PLACEMENT

(B) LATERAL PLACEMENT			(V) VERTICAL PLACEMENT		
CONVENTIONAL		INTERSTATE	INTERSTATE	CONVENTIONAL	
RURAL	URBAN			RURAL	URBAN
6' - 12' FROM EDGE OF PAVEMENT OR SHOULDER	2' MIN WITH CURB	DESIRABLE - 30' FROM TRAVEL LANE ACCEPTABLE - 12' MIN FROM EDGE OF SHOULDER  2' MIN WHEN BEHIND BARRIER	DESIRABLE - 7' ACCEPTABLE - 6'	6'	7'
	2' MIN PLUS SHOULDER		7'		
	WITHOUT CURB		7'		

REVISIONS					
NO.	DATE	APPR.			REMARKS

UTAH DEPARTMENT OF TRANSPORTATION  
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION  
SALT LAKE CITY, UTAH

RECOMMENDED FOR APPROVAL	JULY 03, 2002 DATE
CHAIRMAN STANDARDS COMMITTEE APPROVED	JULY 03, 2002 DATE
DEPUTY DIRECTOR	

## PLACEMENT OF GROUND MOUNT SIGNS

STANDARD DRAWING TITLE

STD DWG  
SN 7